



DOWNLIGHTS

Lumiance

- 115 Insaver LED
- 123 Insaver
- 130 Insaver Quadretto
- 133 Syl-Lighter LED II
- 137 Nexo LED
- 141 Orbito LED





Banquet Sports Hall - Quaregnon, Belgium



| | |
|----------------------|--|
| Control Gear: | Electronic |
| Dimmable: | Analogue 1-10V, DALI and Leading / Trailing edge dimmable |
| Emergency: | Remote 3 hours maintained |
| Reflector: | Scratch proof faceted reflector |
| Housing: | Die-cast aluminum |

- Low recess depth <110mm (Low Profile versions)
- LED technology
- Quick and easy to install
- Extensive choice of accessories
- Optimised photometric performance
- Ideal for applications such as lobbies, residential areas, hallways, open-space offices, meetings rooms and any location that requires long service hours and high switching cycles

Insaver LED

Insaver 75 LED & Insaver 75 LED High Output (HO)

Lumiance



Insaver 75 LED - Round



Insaver 75 LED - Square

- 16W LED white downlight
- Ideal for applications such as reception areas, offices, general public circulation areas, corridors or any location that requires long service hours and high switching cycles
- Insaver 75 LED HO Square 4,000K delivers 1,146lm (luminaires lumen output), equating to 72lm/W (total system efficiency)
- Insaver 75 LED Square 4,000K delivers 897lm (luminaires lumen output), equating to 56lm/W (total system efficiency)
- Choice of 3,000K warm white or 4,000K neutral white colour temperature
- Quick and easy to install
- LED technology provides energy efficient solution and reduced maintenance costs and long lifetime

Insaver 75 LED High Output (HO)

| Code | Description |
|----------------------|-----------------------------------|
| Round - White | |
| 3097176 | Insaver 75 LED RS 16W WW EB WH |
| 3097177 | Insaver 75 LED RS 16W NW EB WH |
| 3097110 | Insaver 75 LED RS 16W WW 1-10V WH |
| 3097111 | Insaver 75 LED RS 16W NW 1-10V WH |

| | |
|-----------------------|--------------------------------------|
| Square - White | |
| 3097178 | Insaver 75 LED SQ RS 16W WW EB WH |
| 3097179 | Insaver 75 LED SQ RS 16W NW EB WH |
| 3097112 | Insaver 75 LED SQ RS 16W WW 1-10V WH |
| 3097113 | Insaver 75 LED SQ RS 16W NW 1-10V WH |

| | |
|------------------------|---------------------------------------|
| Square - Silver | |
| 3097180 | Insaver 75 LED SQ RS 16W WW EB SIL |
| 3097181 | Insaver 75 LED SQ RS 16W NW EB SIL |
| 3097114 | Insaver 75 LED SQ RS 16W WW 1-10V SIL |

Legend: RS = Round; SQ = Square; WW = Warm White; NW = Neutral White; WH = White; 1-10V = Analogue 1-10V dimmable


Insaver 75 LED

| Code | Description |
|----------------------|---------------------------------|
| Round - White | |
| 3097100 | Insaver 75 LED RD 16W WW L/T WH |
| 3097101 | Insaver 75 LED RD 16W NW L/T WH |

| | |
|-----------------------|---------------------------------|
| Square - White | |
| 3097104 | Insaver 75 LED SQ 16W WW L/T WH |
| 3097105 | Insaver 75 LED SQ 16W NW L/T WH |

Legend: RD = Round; SQ = Square; HO = High Output; EB = Electronic Ballast; L/T = Leading / Trailing Edge Dimmable; WW = Warm White; NW = Neutral White; WH = White; SIL = SILver

LIGHT SOURCE INCLUDED

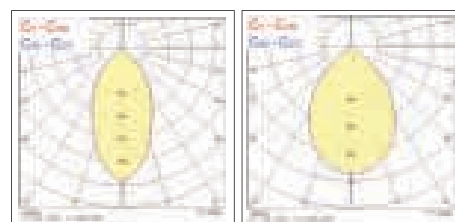

Insaver 75 LED HO - Round


Insaver 75 LED HO - Square



Insaver 75 LED - Round


Insaver 75 LED - Square

Insaver 75 LED Round

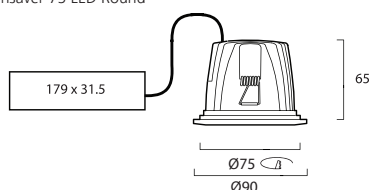

Dimensions (mm)

Insaver 75 LED Square

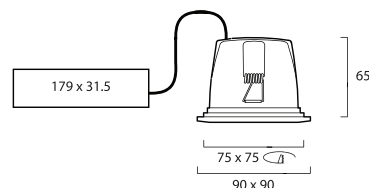



White bezel



Top Rear View


- 19W power consumption
- High light output up to 1,320lm
- High efficacy - up to 70lm/W
- Low weight, faceted, scratch-resistant polycarbonate reflector
- 2 versions: low recess depth (<100mm) and low glare

LIGHT SOURCE INCLUDED



Insaver 150 LED - Low Profile

| Code | Description |
|----------------|---|
| 3,000K | |
| 3097182 | INSAVER 150 LED LO RS 19W WW EB LP |
| 3097120 | INSAVER 150 LED LO RS 19W WW DALI LP |
| 3097203 | INSAVER 150 LED LO RS 19W WW EB E3 LP |
| 3097122 | INSAVER 150 LED LO RS 19W WW DALI E3 LP |
| 4,000K | |
| 3097183 | INSAVER 150 LED LO RS 19W NW EB LP |
| 3097121 | INSAVER 150 LED LO RS 19W NW DALI LP |
| 3097204 | INSAVER 150 LED LO RS 19W NW EB E3 LP |
| 3097123 | INSAVER 150 LED LO RS 19W NW DALI E3 LP |



Insaver 150 LED LO - Low Profile

Insaver 150 LED - Low Glare


| Code | Description |
|----------------|---|
| 3,000K | |
| 3097192 | INSAVER 150 LED LO RS 19W WW EB LG |
| 3097128 | INSAVER 150 LED LO RS 19W WW DALI LG |
| 3097205 | INSAVER 150 LED LO RS 19W WW EB E3 LG |
| 3097130 | INSAVER 150 LED LO RS 19W NW DALI E3 LG |
| 4,000K | |
| 3097193 | INSAVER 150 LED LO RS 19W NW EB LG |
| 3097129 | INSAVER 150 LED LO RS 19W NW DALI LG |
| 3097206 | INSAVER 150 LED LO RS 19W NW EB E3 LG |
| 3097131 | INSAVER 150 LED LO RS 19W NW DALI E3 LG |



Insaver 150 LED LO - Low Glare


Legend: RS = Round; LO = Low Output; EB = Electronic Ballast; DB = Analogue 1-10V dimmable; DALI = DALI dimmable; E = Emergency 3 hour; WW = Warm White; NW = Neutral White; LP = Low Profile; LG = Low Glare; PL3 = Plus 3 version

Insaver 150 LED Low Profile

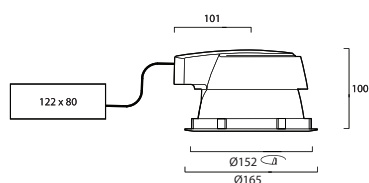

Dimensions (mm)

Insaver 150 LED Low Glare

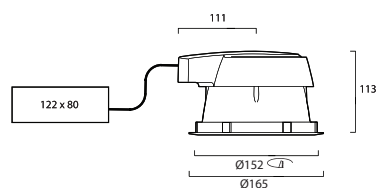



White bezel



Top Rear View


- 30W power consumption
- High light output up to 2,200lm
- High efficacy - up to 75lm/W
- Low weight, faceted, scratch-resistant polycarbonate reflector
- 2 versions: low recess depth (<100mm) and low glare

LIGHT SOURCE INCLUDED



Insaver 150 LED HO - Low Profile


| Code | Description |
|----------------|---|
| 3,000K | |
| 3097184 | INSAVER 150 LED HO RS 30W WW EB LP |
| 3097136 | INSAVER 150 LED HO RS 30W WW DALI LP |
| 3097207 | INSAVER 150 LED HO RS 30W WW EB E3 LP |
| 3097138 | INSAVER 150 LED HO RS 30W WW DALI E3 LP |
| 4,000K | |
| 3097185 | INSAVER 150 LED HO RS 30W NW EB LP |
| 3097137 | INSAVER 150 LED HO RS 30W NW DALI LP |
| 3097208 | INSAVER 150 LED HO RS 30W NW EB E3 LP |
| 3097139 | INSAVER 150 LED HO RS 30W NW DALI E3 LP |



Insaver 150 LED HO - Low Profile

Insaver 150 LED HO - Low Glare


| Code | Description |
|----------------|---|
| 3,000K | |
| 3097186 | INSAVER 150 LED HO RS 30W WW EB LG |
| 3097144 | INSAVER 150 LED HO RS 30W WW DALI LG |
| 3097209 | INSAVER 150 LED HO RS 30W WW EB E3 LG |
| 3097146 | INSAVER 150 LED HO RS 30W WW DALI E3 LG |
| 4,000K | |
| 3097187 | INSAVER 150 LED HO RS 30W NW EB LG |
| 3097145 | INSAVER 150 LED HO RS 30W NW DALI LG |
| 3097212 | INSAVER 150 LED HO RS 30W NW EB E3 LG |
| 3097147 | INSAVER 150 LED HO RS 30W NW DALI E3 LG |




Insaver 150 LED HO - Low Glare

Legend: RS = Round; HO = High Output; EB = Electronic Ballast; DB = Analogue 1-10V dimmable; DALI = DALI dimmable; E = Emergency 3 hour; WW = Warm White; NW = Neutral White; LP = Low Profile; LG = Low Glare; PL3 = Plus 3 version

Insaver 150 LED Low Profile

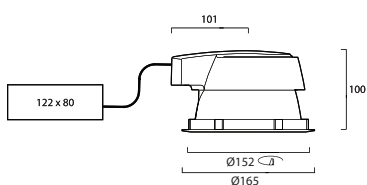

Insaver 150 LED Low Glare

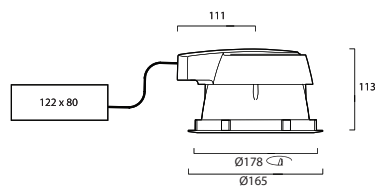

Dimensions (mm)



White bezel



Top Rear View

- 38W power consumption
- Light output up to 2,757lm
- High efficacy - up to 73lm/W
- Low weight, faceted, scratch-resistant polycarbonate reflector
- 2 versions - low recess depth (<100mm) and low glare


LIGHT SOURCE INCLUDED



Insaver 175 LED - Low Profile

| Code | Description |
|----------------|--------------------------------------|
| 3,000K | |
| 3097188 | INSAVER 175 LED RS 38W WW EB LP |
| 3097152 | INSAVER 175 LED RS 38W WW DALI LP |
| 3097213 | INSAVER 175 LED RS 38W WW EB E3 LP |
| 3097154 | INSAVER 175 LED RS 38W WW DALI E3 LP |

| | |
|----------------|--------------------------------------|
| 4,000K | |
| 3097189 | INSAVER 175 LED RS 38W NW EB LP |
| 3097153 | INSAVER 175 LED RS 38W NW DALI LP |
| 3097214 | INSAVER 175 LED RS 38W NW EB E3 LP |
| 3097155 | INSAVER 175 LED RS 38W NW DALI E3 LP |




Insaver 175 LED - Low Profile

Insaver 175 LED - Low Glare

| Code | Description |
|----------------|--------------------------------------|
| 3,000K | |
| 3097190 | INSAVER 175 LED RS 38W WW EB LG |
| 3097160 | INSAVER 175 LED RS 38W WW DALI LG |
| 3097215 | INSAVER 175 LED RS 38W WW EB E3 LG |
| 3097162 | INSAVER 175 LED RS 38W WW DALI E3 LG |


| | |
|----------------|--------------------------------------|
| 4,000K | |
| 3097191 | INSAVER 175 LED RS 38W NW EB LG |
| 3097161 | INSAVER 175 LED RS 38W NW DALI LG |
| 3097216 | INSAVER 175 LED RS 38W NW EB E3 LG |
| 3097163 | INSAVER 175 LED RS 38W NW DALI E3 LG |



Insaver 175 LED - Low Glare


Legend: RS = Round; EB = Electronic Ballast; PL3 = Plus³ version;
DB = Analogue 1-10V dimmable; DALI = DALI dimmable; E =
Emergency 3 hour; WW = Warm White; NW = Neutral White; LP
= Low Profile; LG = Low Glare

Insaver 175 LED Low Profile

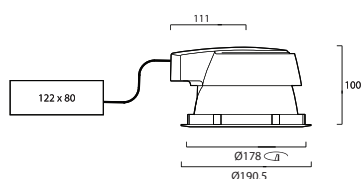


Dimensions (mm)

Insaver 175 LED Low Glare

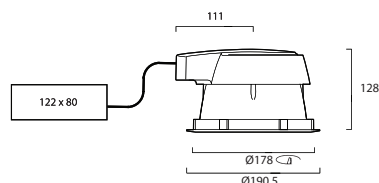


Accessories




Clear Glass Cover (IP44)




Deco Ring White



Floating Glass



Mounting Plate



Deco Ring Silver

Insaver 75 LED Accessories

| Code | Description |
|---------|------------------------|
| 3097166 | Round Deco Ring White |
| 3097167 | Round Deco Ring Silver |

Insaver 150 LED Accessories

| Code | Description |
|---------|------------------|
| 3097168 | Clear Glass IP44 |
| 3097169 | Deco Ring White |
| 3097170 | Deco Ring Silver |
| 3097171 | Mounting Plate |
| 3097172 | Floating Glass |

Insaver 175 LED Accessories

| Code | Description |
|---------|------------------|
| 3097173 | Clear Glass IP44 |
| 3097174 | Deco Ring White |
| 3097175 | Deco Ring Silver |
| 3005550 | Floating glass |



Banquet Sports Hall - Quaregnon, Belgium







Control Gear: Electronic
Dimmable: Analogue 1-10V or DALI dimmable
Emergency: Remote 3 hours maintained
Reflector: Scratch proof faceted reflector
Housing: Choice of white or silver bezel

- Low recess depth (115mm) (Insaver HE 175)
- High light output ratio up to 71 %
- Quick and easy to install
- Extensive choice of accessories
- Optimised photometric performance according to EN12464-1

Insaver



White bezel

- High light output ratio 68-70%
- Scratch resistant reflector
- Extensive choice of accessories
- Electronic gear

Electronic

| Code | Description |
|---------|-----------------------|
| 3025810 | INSAVER 175 HE 13W EB |
| 3025860 | INSAVER 175 HE 18W EB |
| 3025910 | INSAVER 175 HE 26W EB |

Analogue 1-10V dimmable



| Code | Description |
|---------|-----------------------|
| 3025880 | INSAVER 175 HE 18W DB |
| 3025930 | INSAVER 175 HE 26W DB |

Emergency 3 hour


| Code | Description |
|---------|------------------------------|
| 3094056 | INSAVER 175 HE 26W PL2 EB E3 |

Legend: EB = Electronic Ballast; PL3 = Plus³ version;
DB = Analogue 1-10V dimmable; E3 = Emergency 3 hour


LIGHT SOURCE NOT INCLUDED




Lynx®-DE TC-DEL
13W G24q-1 900lm
18W G24q-2 1215lm
26W G24q-3 1800lm



TC-DEL - 13W




TC-DEL - 18W




TC-DEL - 26W

175 Open HF emergency/DSI/DSI Emg

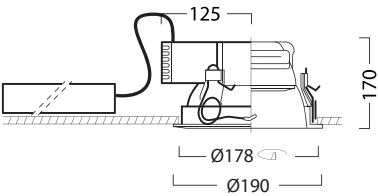

Dimensions (mm)

175 Open HF






Insaver HE 225 Open

- High light output ratio up to 71 %
- Scratch resistant reflector
- Extensive choice of accessories
- Stylish surface mounted version

LIGHT SOURCE NOT INCLUDED



850°C




Lynx®-DE TC-DEL
18W G24q-2 1215lm
26W G24q-3 1800lm

Electronic


| Code | Description |
|---------|---------------------------|
| 3029570 | INSAVER 255 HE 2 X 18W EB |
| 3029580 | INSAVER 255 HE 2 X 26W EB |

Analogue 1-10V dimmable

| Code | Description |
|---------|---------------------------|
| 3029610 | INSAVER 255 HE 2 X 18W DB |
| 3029620 | INSAVER 255 HE 2 X 26W DB |



TC-DEL - 2 x 18W




TC-DEL - 2 x 26W

Emergency 3 hour


| Code | Description |
|---------|------------------------------|
| 3094059 | INSAVER 255 HE 2 X 18W EB E3 |
| 3094062 | INSAVER 255 HE 2 X 26W EB E3 |

Legend: EB = Electronic Ballast; PL3 = Plus³ version; DB = Analogue 1-10V dimmable; E3 = Emergency 3 hour

225 Open HF

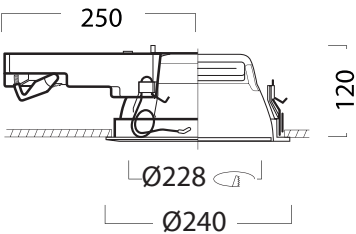

225 Open HF emergency/DSI/DSI Emg

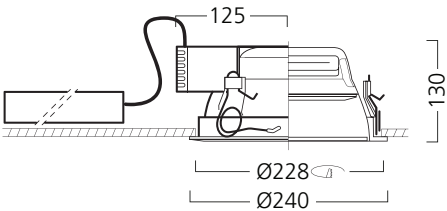

Dimensions (mm)



White bezel



Insaver 225 Surface

- Optimised reflector for even ceiling to wall illumination
- Basic appearance of the Insaver HE range

Wallwasher



| Code | Description |
|-------------------|--------------------------------------|
| Electronic | |
| 3033300 | INSAVER 255 WALLWASHER HE 2 X 18W EB |
| 3033310 | INSAVER 255 WALLWASHER HE 2 X 26W EB |

Surface


| Code | Description |
|-------------------|----------------------------------|
| Electronic | |
| 3033800 | INSAVER255 SURFACE HE 2 X 18W EB |
| 3033810 | INSAVER255 SURFACE HE 2 X 26W EB |

Legend: EB = Electronic Ballast; PL3 = Plus³ version


LIGHT SOURCE NOT INCLUDED



Lynx®-DE TC-DEL
18W G24q-2 1200lm
26W G24q-3 1800lm




TC-DEL - 2 x 18W




TC-DEL - 2 x 26W

Wallwasher
minimum recess dimensions:
580x500x200mm

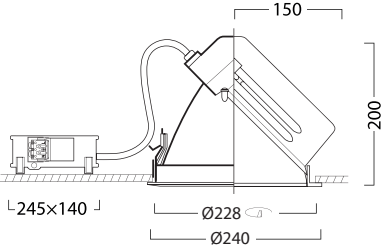

Dimensions (mm)

225 Surface






White bezel

- Scratch proof polycarbonate reflector
- Quick and easy to install
- 'Floating' fresnel diffuser
- Closed fixture with IP34 classification

LIGHT SOURCE NOT INCLUDED



Lynx®-DE TC-DEL
13W G24q-3 900lm
18W G24q-3 1215lm
26W G24q-3 1800lm


Electronic

| Code | Description |
|---------|----------------------------|
| 3033030 | INSAVER 175 HE CONE 13W EB |
| 3033080 | INSAVER 175 HE CONE 18W EB |
| 3033130 | INSAVER 175 HE CONE 26W EB |


Emergency 3 hour

| Code | Description |
|---------|--------------------------------|
| 3033100 | INSAVER 175 HE CONE 18W PL2 EB |
| 3033150 | INSAVER 175 HE CONE 26W PL2 EB |


Legend: EB = Electronic Ballast; PL3 = Plus3 version; E3 = Emergency 3 hour



TC-DEL - 13W




TC-DEL - 18W




TC-DEL - 26W

175 Cone HF
minimum recess dimensions:
400x400x115mm

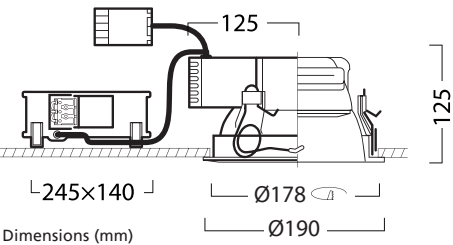

175 Cone HF emergency
minimum recess dimensions:
465x490x170mm

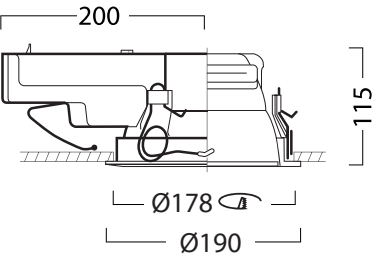




White bezel

- Scratch proof polycarbonate reflector
- 'Floating' fresnel diffuser
- Quick and easy to install
- Extensive choice of accessories
- Closed fixture with IP34 classification

LIGHT SOURCE NOT INCLUDED



Lynx®-DE TC-DEL
18W G24q-2 1200lm
26W G24q-3 1800lm


Electronic

| Code | Description |
|---------|--------------------------------|
| 3033180 | INSAVER 225 HE CONE 2 x 18W EB |
| 3033230 | INSAVER 225 HE CONE 2 x 26W EB |


Emergency 3 hour

| Code | Description |
|---------|-----------------------------------|
| 3033200 | INSAVER 225 HE CONE 2 x 18W EB E3 |
| 3033250 | INSAVER 225 HE CONE 2 x 26W EB E3 |

Legend: EB = Electronic Ballast; PL3 = Plus³ version;
E3 = Emergency 3 hour




TC-DEL - 2 x 18W




TC-DEL - 2 x 26W

225 Cone HF
minimum recess dimensions:
500x500x120mm




225 Cone HF emergency
minimum recess dimensions:
465x490x170mm

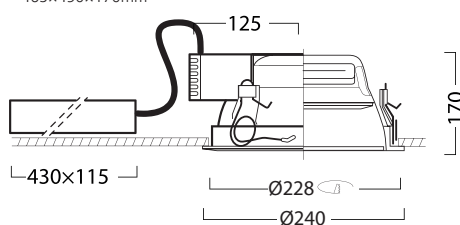


Accessories



PC Dotted Cover (IP44)




Etched Decorative Glass Cover (IP44)



Floating Glass




Deco Trim Round



Clear Glass Cover (IP44)



Aluminium Cross Louvre



Mounting Plate Insaver 225

Insaver HE 175 Open & Cone Accessories


| Code | Description | Colour |
|---------|--------------------------------------|--------|
| 3006940 | PC dotted cover (IP44) | |
| 3006950 | Etched decorative glass cover (IP44) | |
| 3006920 | Clear glass cover (IP44) | |
| 3005550 | Floating glass | |
| 3005960 | Deco trim 175 round | White |
| 3005970 | Deco trim 175 round | White |

Insaver HE 225 Open & Cone Accessories

| Code | Description | Colour |
|---------|--------------------------------------|--------|
| 3005700 | PC dotted cover (IP44) | |
| 3005710 | Etched decorative glass cover (IP44) | |
| 3005740 | Clear glass cover (IP44) | |
| 3005720 | Aluminium cross louvre | |
| 3005570 | Floating glass | |
| 3005980 | Deco trim 225 round | White |
| 3005990 | Deco trim 225 round | Silver |
| 3004887 | Mounting plate Insaver 225 | |

Insaver HE 225 Wallwasher Accessories

| Code | Description | Colour |
|---------|--------------------------|--------|
| 3005740 | Clear glass cover (IP44) | |
| 3005980 | Deco trim 225 round | White |
| 3005990 | Deco trim 225 round | Silver |



Silver

- Square compact fluorescent downlight
- High light output ratio up to 68%
- Low recess depth of 115mm
- IP44 with glass cover (to be ordered separately)

Electronic

| Code | Description |
|---------------|-------------------------------------|
| White | |
| 3029260 | INSAVER 200 QUADRETTO 26W EB WH |
| 3029410 | INSAVER 200 QUADRETTO 2 X 26W EB WH |
| Silver | |
| 3029280 | INSAVER 200 QUADRETTO 26W EB SI |
| 3029430 | INSAVER 200 QUADRETTO 2 X 26W EB SI |

Legend: EB = Electronic Ballast; DSI = DSI dimmable; WH = White; SI = Silver


LIGHT SOURCE NOT INCLUDED




* with Etched decorative glass




Lynx®-TE TC-TEL
26W GX24q-3 1800lm




TC-TEL - 1 x 26W



TC-DEL - 2 x 26W




Etched Decorative Glass
Cover (IP44)



Mounting Plate

Accessories

| Code | Description |
|---------|--------------------------------------|
| 3057800 | Etched decorative glass cover (IP44) |

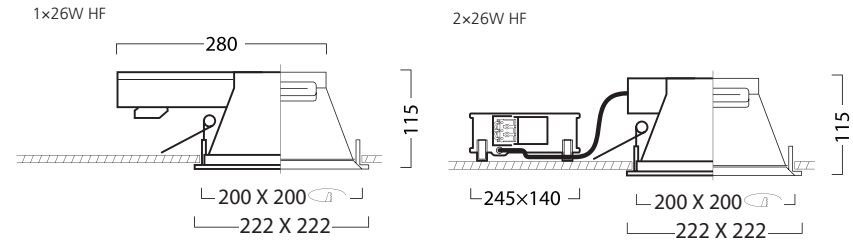

Dimensions (mm)



Police station - Jumet, Belgium





Control gear: Electronic
Dimmable: Analogue 1-10V and DALI dimmable
Housing: Die-cast aluminium
Colour: White bezel (RAL 9003)

- New and improved range of LED downlights perfect for the replacement of CFL luminaire solutions
- Benefits from less maintenance and 50% more energy efficiency than a CFL downlight, with a lifetime of 50,000 hours
- With its IP44 rating, the range is perfect for corridors, WCs, areas of high public circulation and reception areas
- Delivers an improved overall performance; it now offers higher outputs of up to 2,289 lumens (Round 240 4,000K version)
- Reaches a higher efficacy of up to 99lm/W (Round 195 4,000K version)
- The range now includes a solution for 225mm ceiling cut outs
- With the inclusion of a loop-in loop-out facility, security cable attachment and a recess depth of less than 65mm, the Syl-Lighter LED II provides a simple yet effective installation solution

Syl-Lighter LED II



Syl-Lighter LED II - Round - 165



Complete Syl-Lighter LED II



Close-up view




Face view

- Syl-Lighter LED II is available in 4 different round body sizes: 165mm, 195mm, 220mm & 240mm
- Syl-Lighter LED II 165 12W delivers a 1,134 lumen output (4,000K) - perfect for 1x26W CFL replacement
- Syl-Lighter LED II 195 15W delivers a 1,480 lumen output (4,000K) - perfect for 1x32W/2x18W CFL replacement
- Syl-Lighter LED II 220 21W delivers a 1,989 lumen output (4,000K) - perfect for 1x42W CFL replacement
- Syl-Lighter LED II 240 25W delivers a 2,289 lumen output (4,000K) - perfect for 2x26W CFL replacement
- Choice of 3,000K (warm white) or 4,000K (neutral white)
- Shallow recess depth of <65mm
- Can replace existing large CFL downlights using a 225mm ceiling cut out (Syl-Lighter LED II 240)
- Energy efficient electronic gear including analogue 1-10V and DALI dimmable options
- 3 hour emergency pack available (To be ordered in addition to the luminaire)
- Loop in-Loop out facility with red push fit terminal block for quick wiring
- Energy Class: A++, A+, A
- Long lifetime: 50,000 hours life at L70 (L80: 30,000 hours, L90: 15,000 hours)

Round - 165

| Code | Description |
|--------------------------------|--|
| Electronic ballast | |
| 3031800 | Syl-Lighter LED II 165 RO 12W WW |
| 3031801 | Syl-Lighter LED II 165 RO 12W NW |
| Analogue 1-10V dimmable | |
| 3031830 | Syl-Lighter LED II 165 RO 12W WW 1-10V |
| 3031831 | Syl-Lighter LED II 165 RO 12W NW 1-10V |
| DALI dimmable | |
| 3031806 | Syl-Lighter LED II 165 RO 12W WW DALI |
| 3031807 | Syl-Lighter LED II 165 RO 12W NW DALI |


LIGHT SOURCE INCLUDED

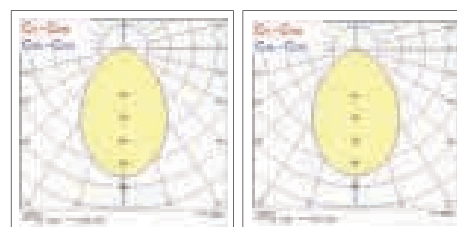

Round - 165mm - 3,000K

Round - 165mm - 4,000K

Round - 165

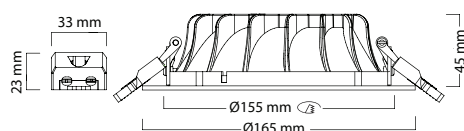



Syl-Lighter LED II - Round - 195



Syl-Lighter LED II - Round - 220



Syl-Lighter LED II - Round - 240

Round - 195

Code **Description**
Electronic ballast

| | |
|----------------|----------------------------------|
| 3031808 | Syl-Lighter LED II 195 RO 15W WW |
| 3031809 | Syl-Lighter LED II 195 RO 15W NW |

Analogue 1-10V dimmable

| | |
|----------------|--|
| 3031810 | Syl-Lighter LED II 195 RO 15W WW 1-10V |
| 3031811 | Syl-Lighter LED II 195 RO 15W NW 1-10V |

DALI dimmable

| | |
|----------------|---------------------------------------|
| 3031812 | Syl-Lighter LED II 195 RO 15W WW DALI |
| 3031813 | Syl-Lighter LED II 195 RO 15W NW DALI |

Round - 220

Code **Description**
Electronic ballast

| | |
|----------------|----------------------------------|
| 3031816 | Syl-Lighter LED II 220 RO 21W WW |
| 3031817 | Syl-Lighter LED II 220 RO 21W NW |

Analogue 1-10V dimmable

| | |
|----------------|--|
| 3031818 | Syl-Lighter LED II 220 RO 21W WW 1-10V |
| 3031819 | Syl-Lighter LED II 220 RO 21W NW 1-10V |

DALI dimmable

| | |
|----------------|---------------------------------------|
| 3031820 | Syl-Lighter LED II 220 RO 21W WW DALI |
| 3031821 | Syl-Lighter LED II 220 RO 21W NW DALI |

Round - 240

Code **Description**
Electronic ballast

| | |
|----------------|----------------------------------|
| 3031824 | Syl-Lighter LED II 240 RO 25W WW |
| 3031825 | Syl-Lighter LED II 240 RO 25W NW |


Analogue 1-10V dimmable

| | |
|----------------|--|
| 3031826 | Syl-Lighter LED II 240 RO 25W WW 1-10V |
| 3031827 | Syl-Lighter LED II 240 RO 25W NW 1-10V |


DALI dimmable

| | |
|----------------|---------------------------------------|
| 3031828 | Syl-Lighter LED II 240 RO 25W WW DALI |
| 3031829 | Syl-Lighter LED II 240 RO 25W NW DALI |


LIGHT SOURCE INCLUDED




Round - 195mm - 3,000K




Round - 195mm - 4,000K




Round - 220mm - 3,000K



Round - 220mm - 4,000K



Round - 240mm - 3,000K




Round - 240mm - 4,000K

Accessories


Code **Description**

| | |
|----------------|---|
| 3031832 | Syl-Lighter LED II 165/195/220/240 EMG Pack |
|----------------|---|


Round - 195

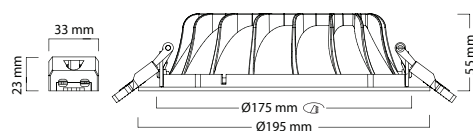



Round - 220

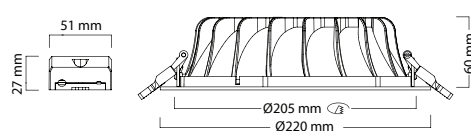


Round - 240

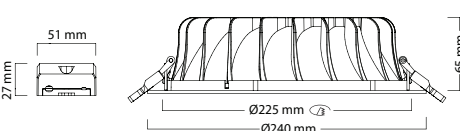

Loop-In Loop-Out Box

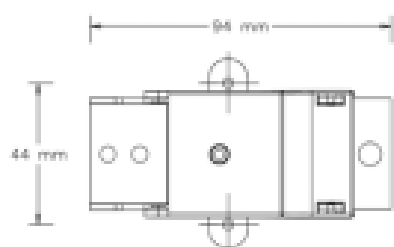

Syl-Lighter LED II - Emergency Pack

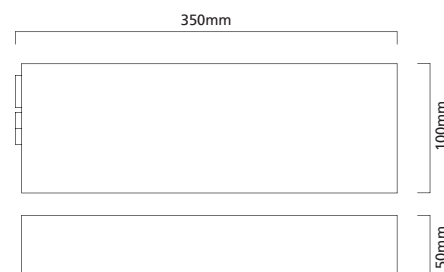





Control Gear: Electronic
Housing: White

- Round and square downlights
- Developed for use in areas such as bathrooms or wet areas as well as corridors, back of house and any location that requires long service hours and high switching cycles
- Nexo LED is available in 2 different body styles: 170mm round & 155 x 155mm square
- Nexo LED offers a recessed diffuser for an improved visual comfort
- Easy to install with a very small recess depth (92mm)

Nexo LED



Nexo LED Square



Nexo LED Round

- 15W LED downlight
- Ideal for applications such as corridors, back of house areas and any location that requires long service hours with high switching cycles
- IP44 rating allows for installation in applicable zone 1 wet areas
- Nexo LED is available in 2 different body styles: Ø170mm round and 155 x 155mm square
- Recessed diffuser for an improved visual comfort
- Nexo LED Square 4,000K delivers 1,036lm (luminaire lumen output), equating to 69lm/W (total system efficiency)
- Choice of 3,000K (Warm white) or 4,000K (Neutral white)
- Small recess depth (92mm)
- Quick and easy to install
- Lifetime: 35,000 hour
- Energy Class: A++, A+, A
- LED technology provides an energy efficient solution with reduced maintenance costs

Square


| Code | Description |
|---------|--------------------|
| 3033101 | Nexo LED SQ 155 WW |
| 3033102 | Nexo LED SQ 155 NW |

Round


| Code | Description |
|---------|--------------------|
| 3033103 | Nexo LED RO 170 WW |
| 3033104 | Nexo LED RO 170 NW |

Legend: SQ = Square; RO = Round; WW = Warm White, NW = Neutral White


LIGHT SOURCE INCLUDED




Nexo LED Square 3,000K



Nexo LED Square 4,000K




Nexo LED Round 3,000K




Nexo LED Round 4,000K

Square - 155mm

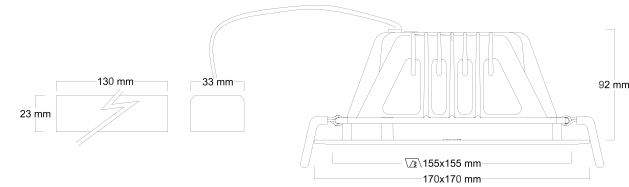

Round - 170mm

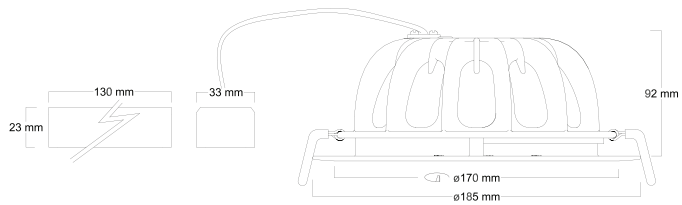

Dimensions (mm)







Control Gear: Electronic
Housing: White

- Developed for use in bathrooms or wet areas as well as corridors, back of house and any location that requires long service hours and high switching cycles
- Highly efficient with up to 75lm/W (total system efficiency on Orbito Round 4,000K version) at only 5W of power consumption
- The range comes including driver, offers a loop-in/loop-out feature and is easy to install with a very small recess depth (91mm)

Orbito LED



Orbito LED with driver positioned on top of the luminaire

- 5W LED downlight
- IP44 rating allows for use in applicable zone 1 wet areas
- Detachable LED driver allows for use in low ceiling void areas
- Highly efficient LED downlight - up to 75lm/W (total system efficiency on Orbito Round 4,000K version)
- Choice of 3,000K (Warm white) or 4,000K (Neutral white)
- Small recess depth (91mm)
- Quick and easy to install
- Loop-in/loop-out wiring capability
- LED lifetime: 30,000 hours
- Energy Class: A++, A+, A
- LED technology provides energy efficient solution and reduced maintenance costs


LIGHT SOURCE INCLUDED




Round LED accent downlights

| Code | Description |
|---------|------------------|
| 3079501 | Orbito LED 5W WW |
| 3079502 | Orbito LED 5W NW |

Legend: WW = Warm White; NW = Neutral White




Orbito LED 3,000K



Orbito LED 4,000K

Orbito LED with driver positioned on top of the luminaire

Orbito LED with driver positioned on the side of the luminaire

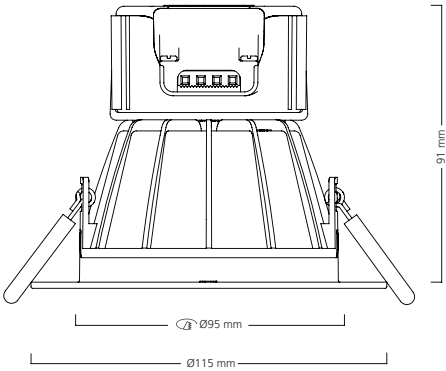

Dimensions (mm)

